1. Fill Degassing Tank

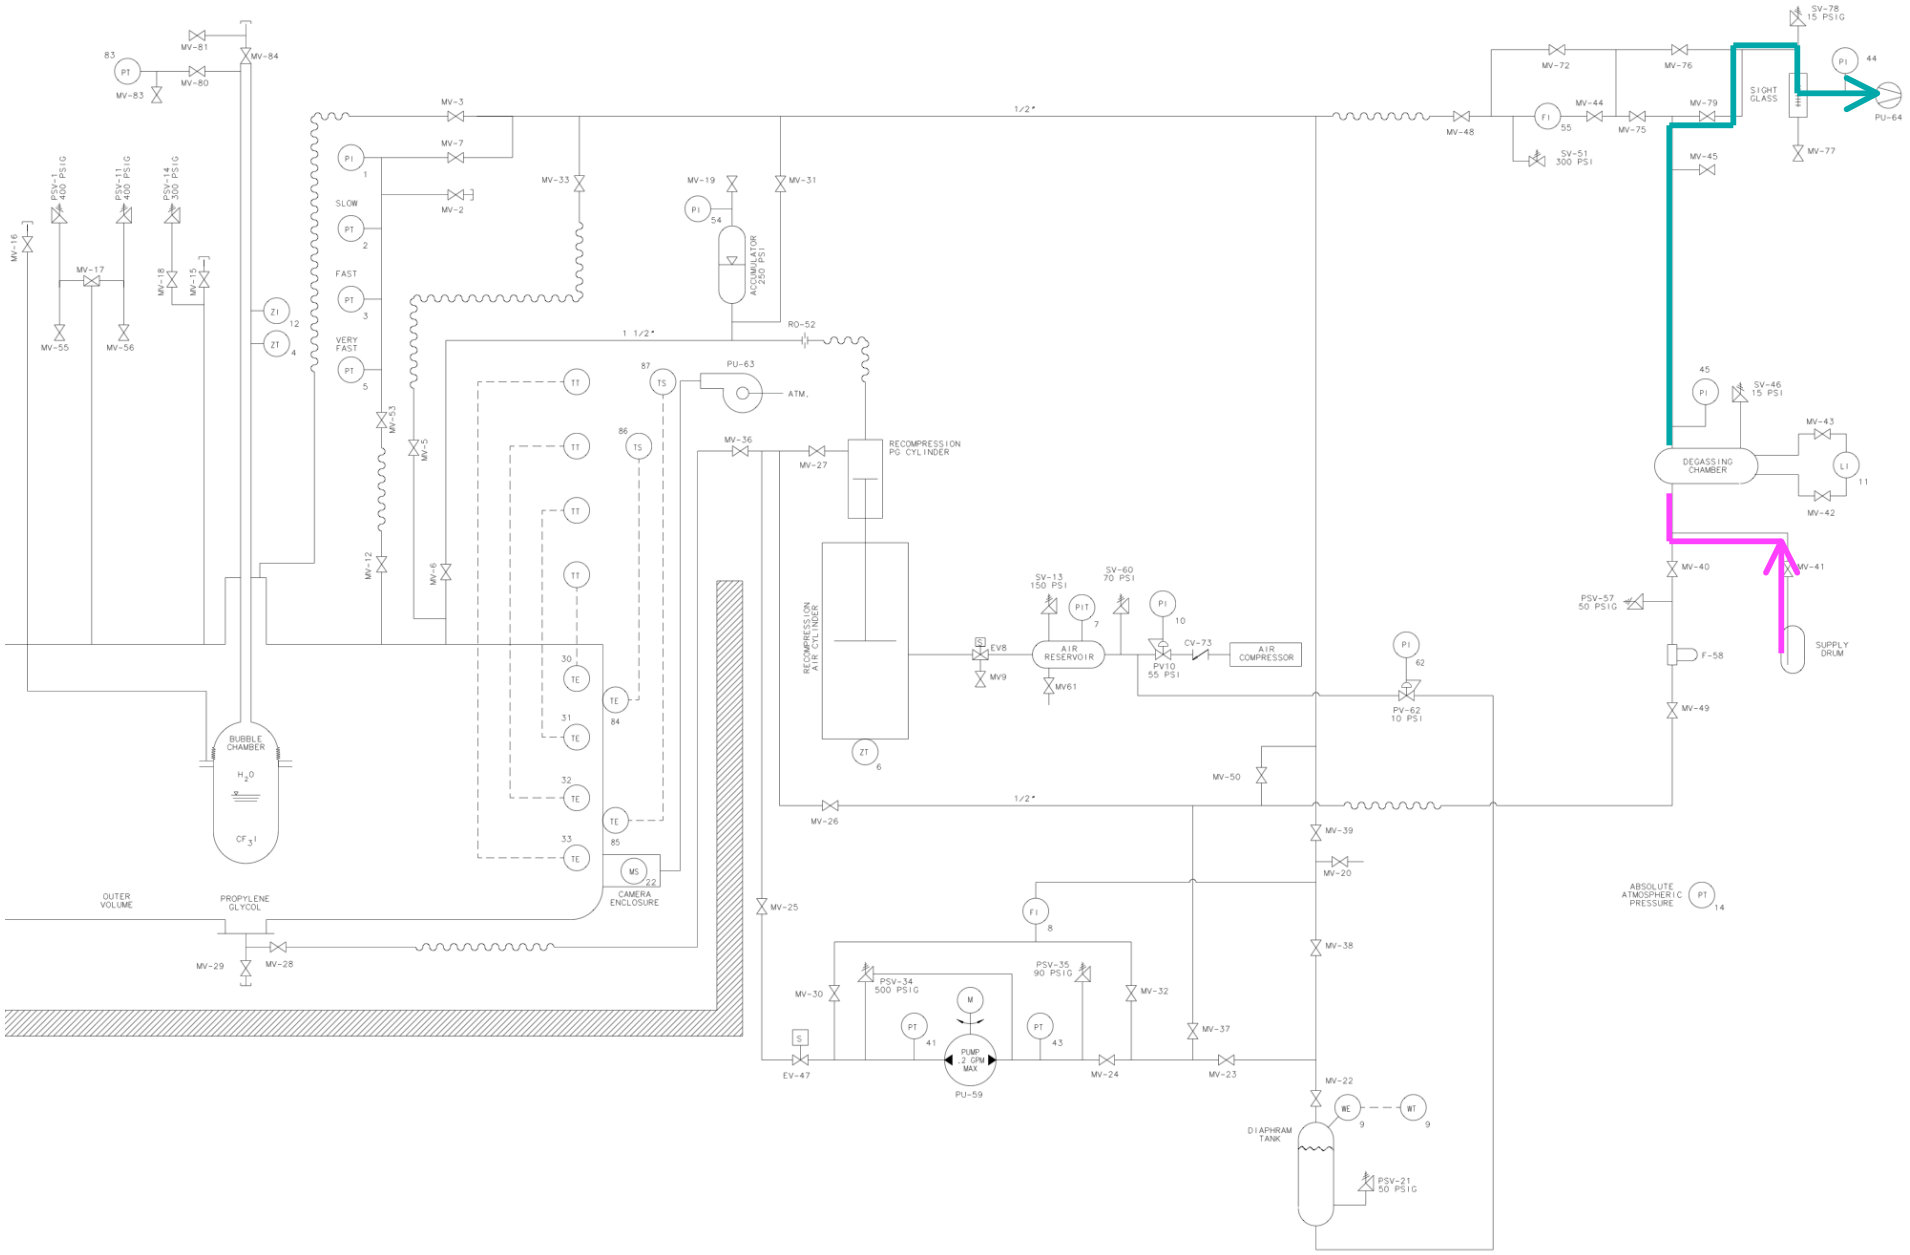

2. Evacuate Diaphragm Tank

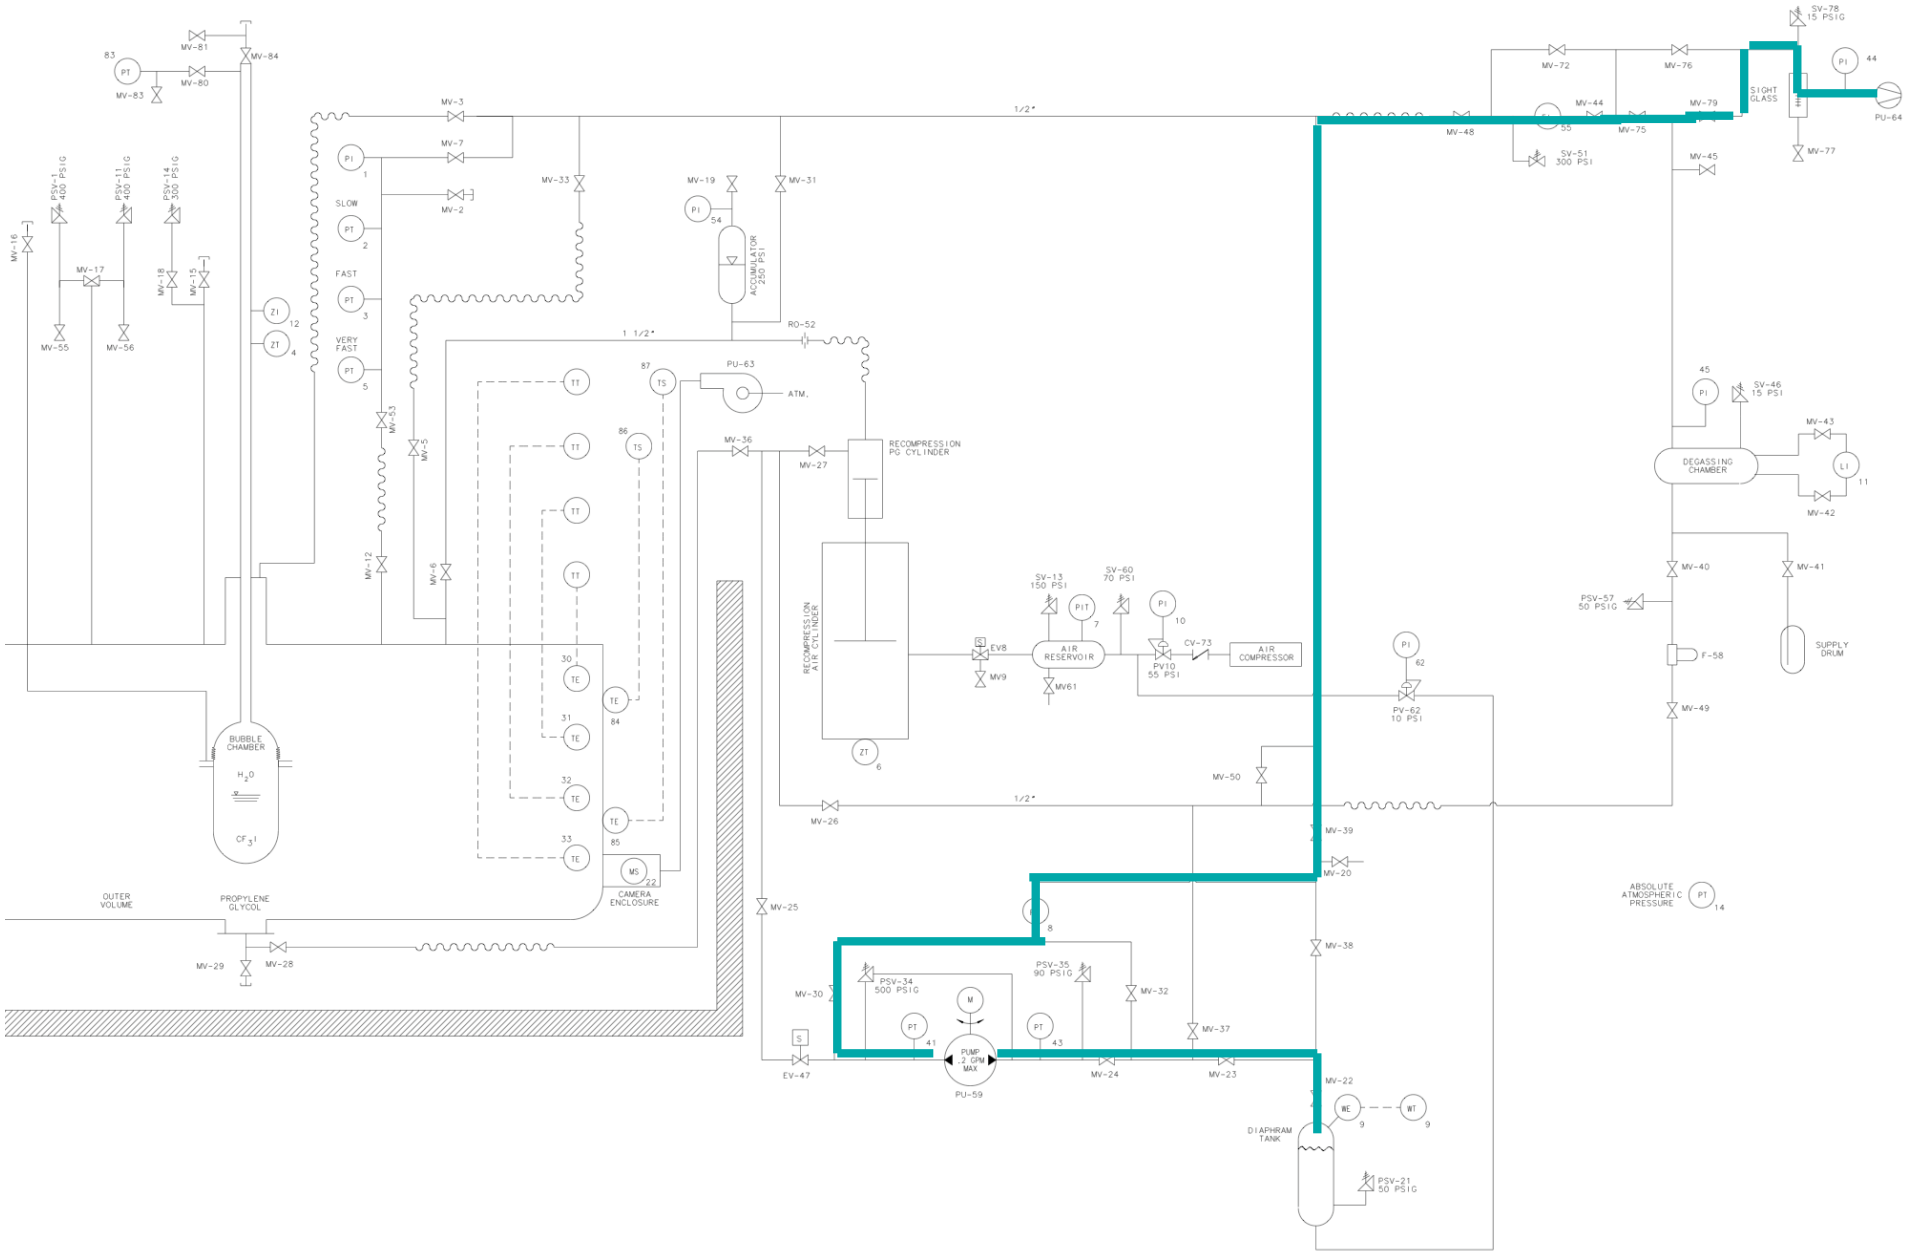

3. Fill Diaphragm Tank With Glycol

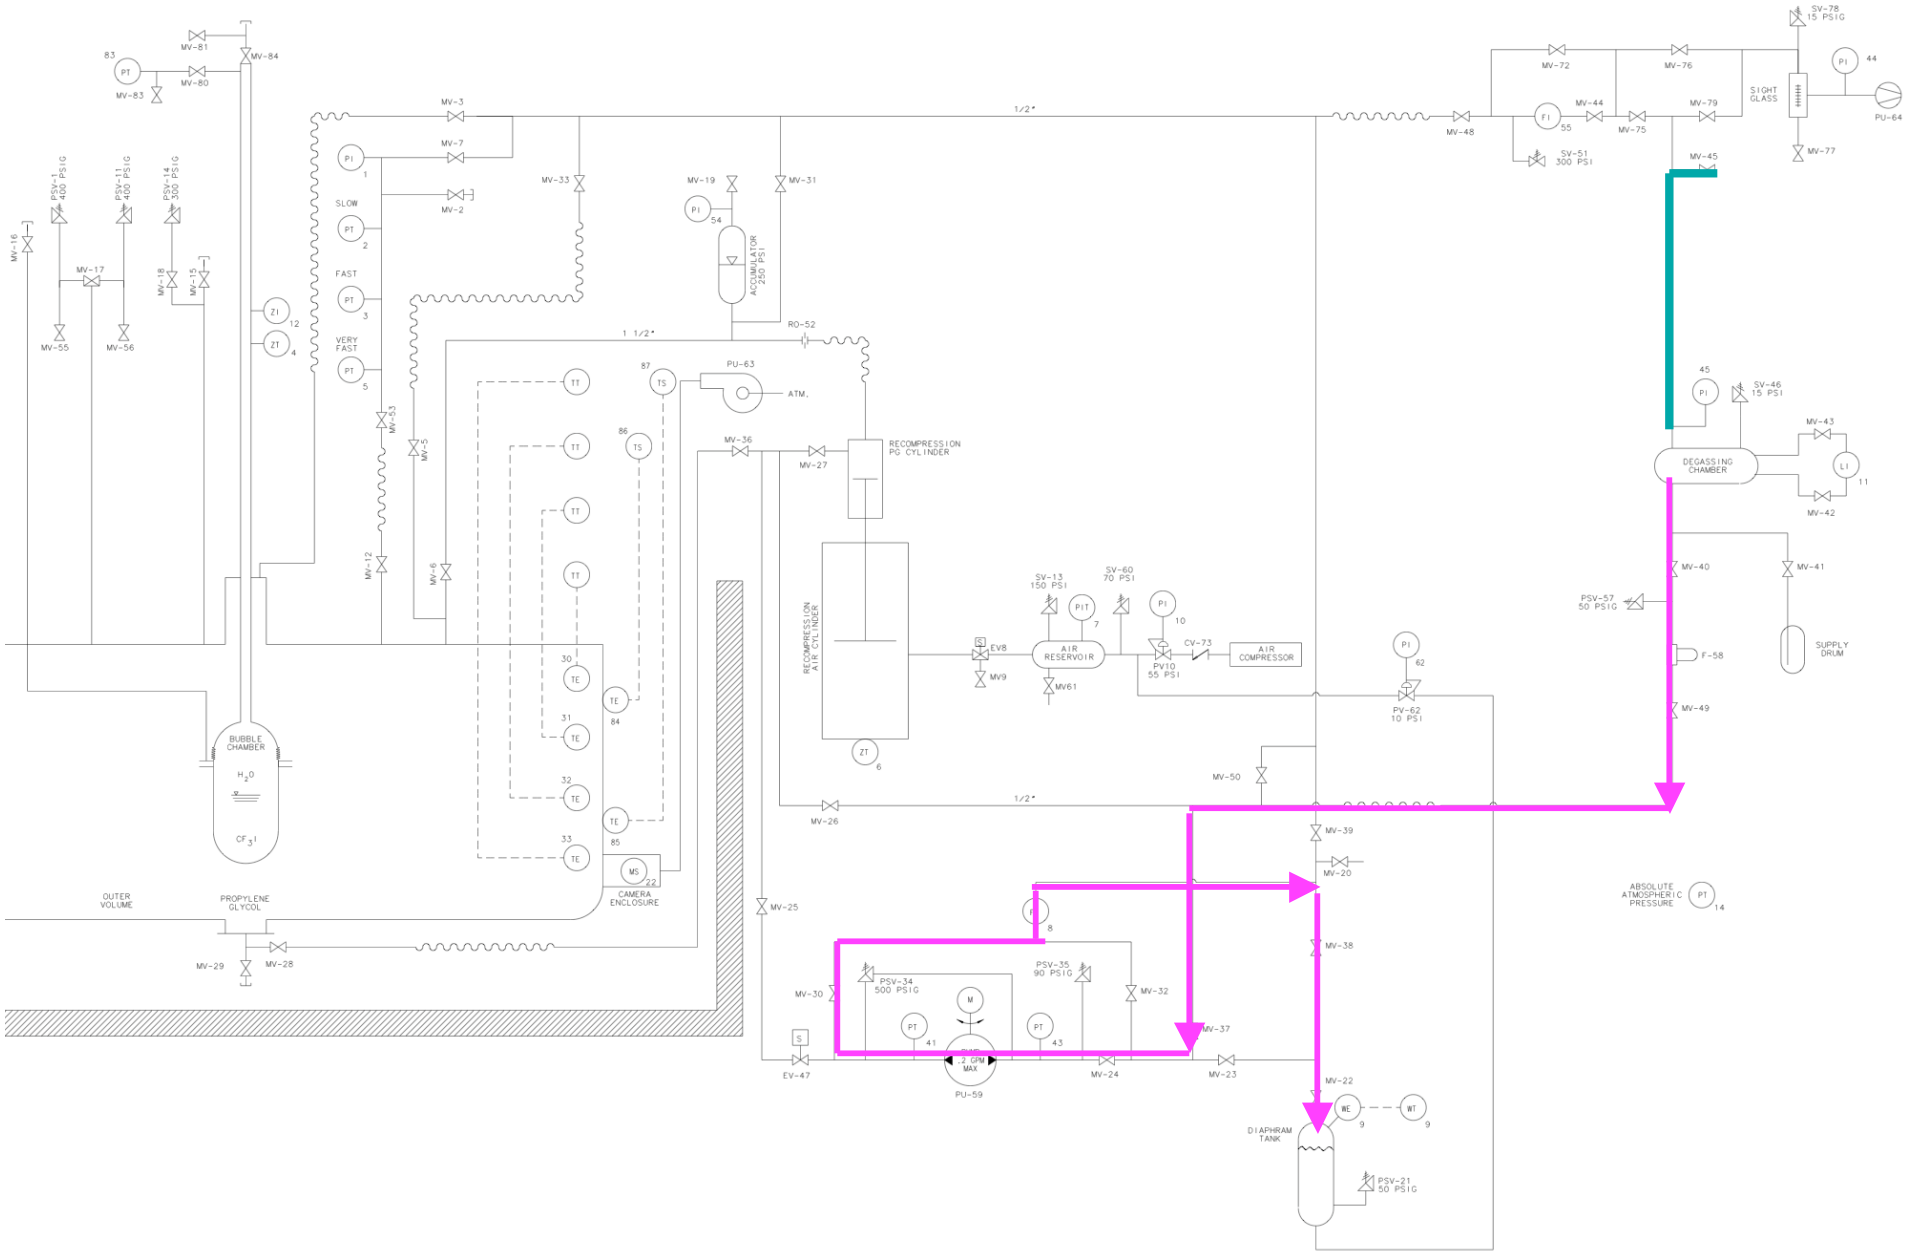

4. Evacuate Outer Vessel and Hydraulic Lines

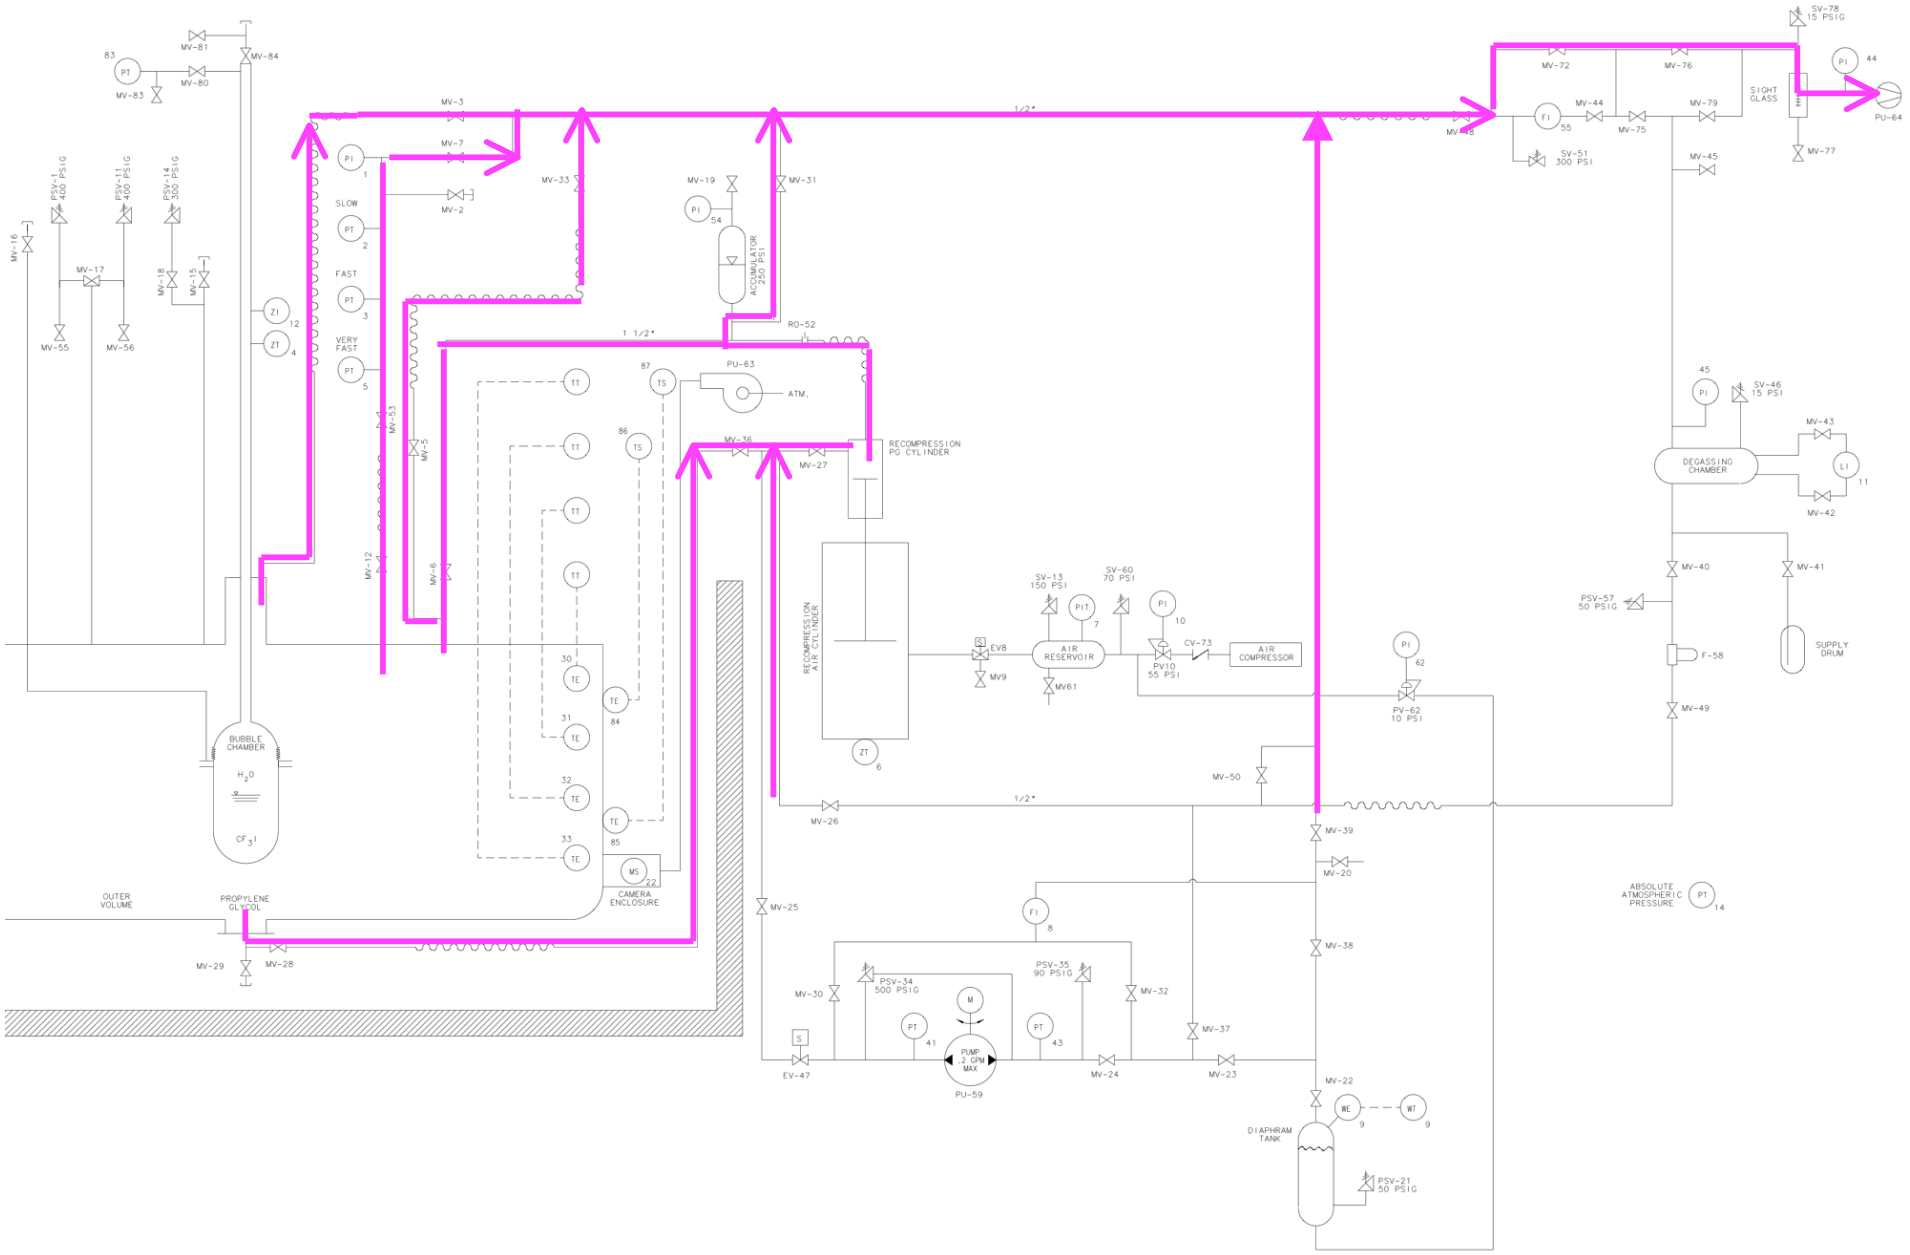

5. Test Control Loops and Interlocks

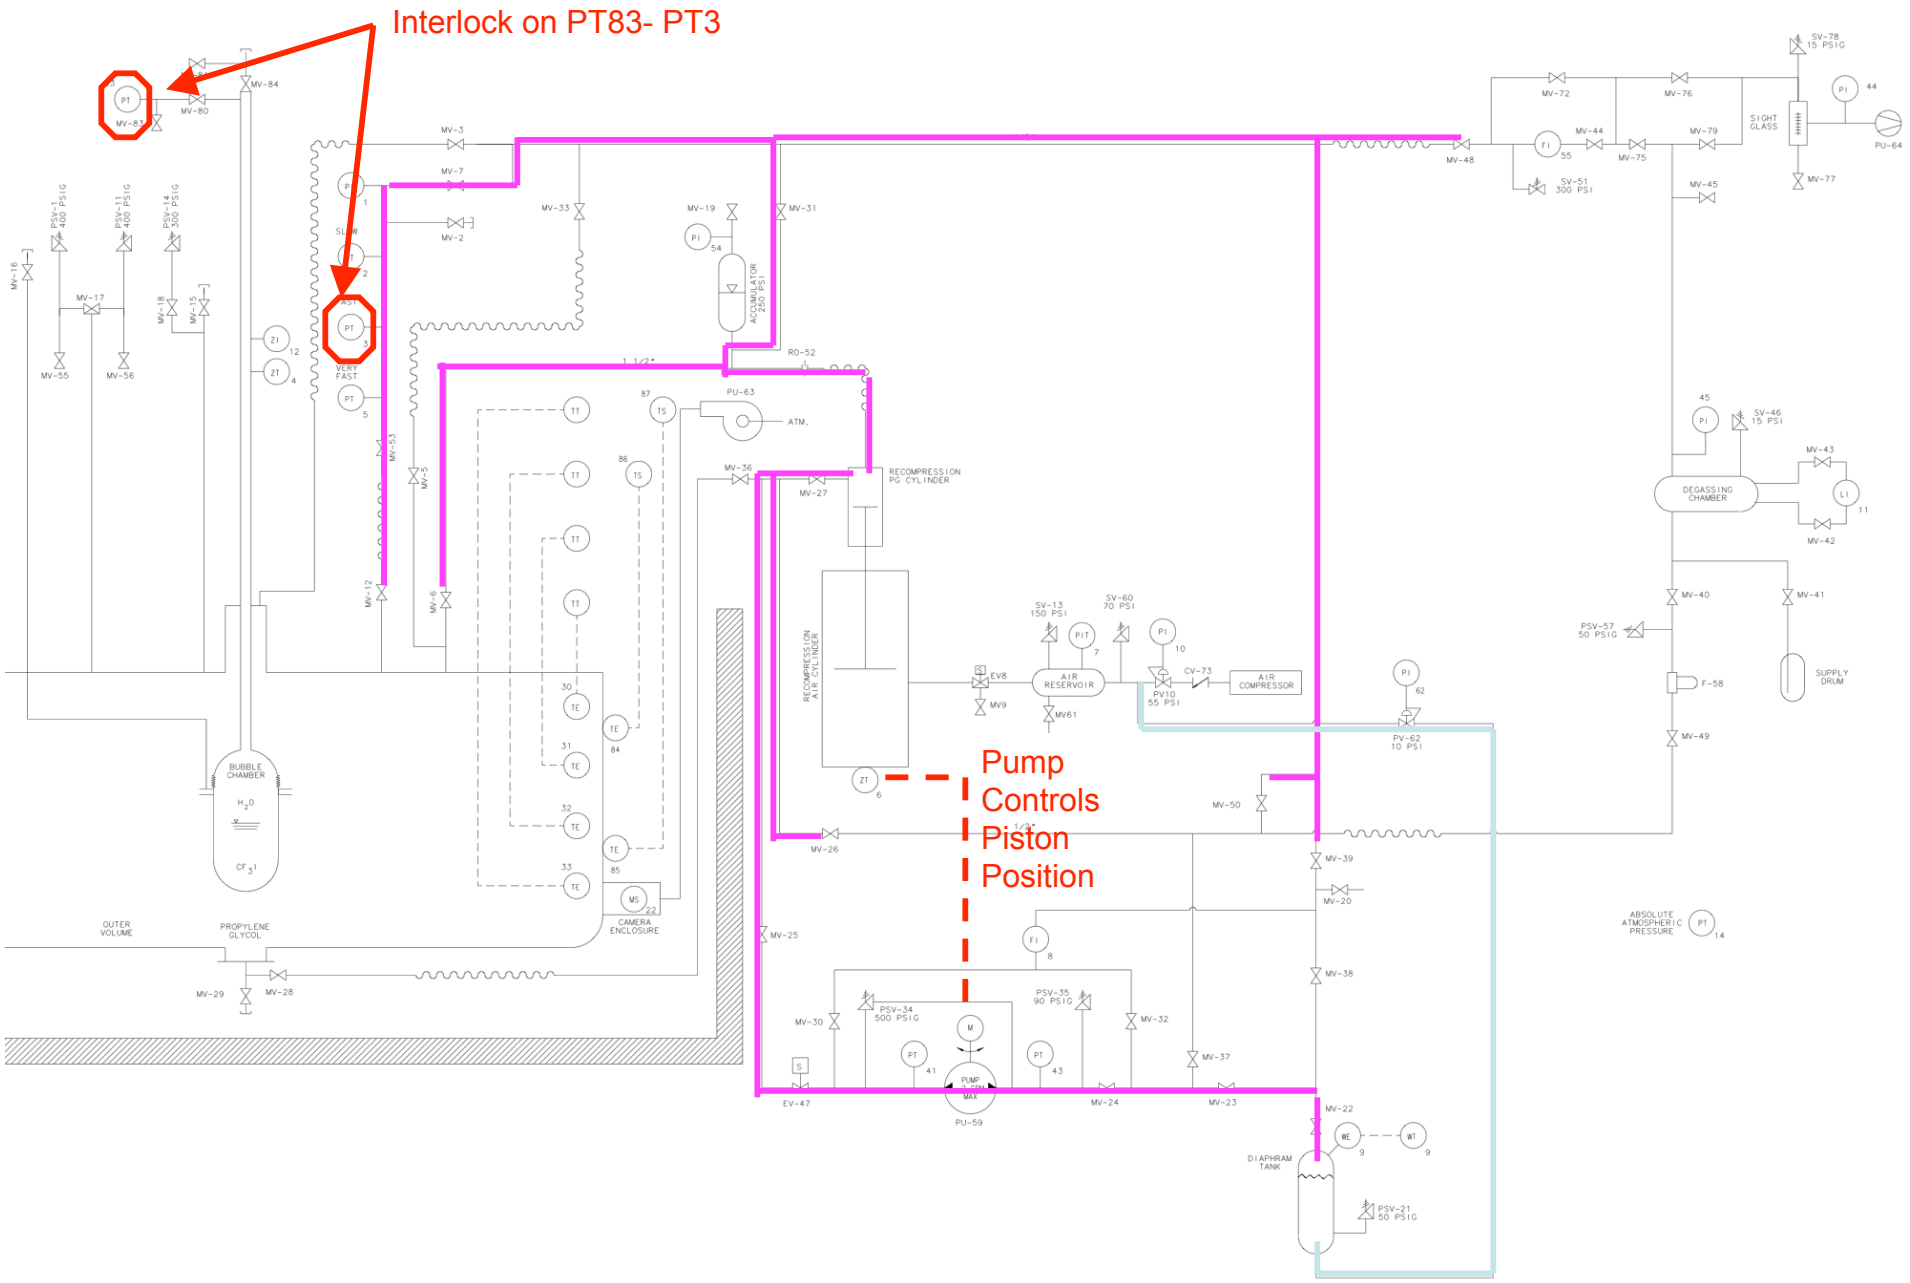

6. Fill Pressure Vessel and Hydraulic Lines With Glycol

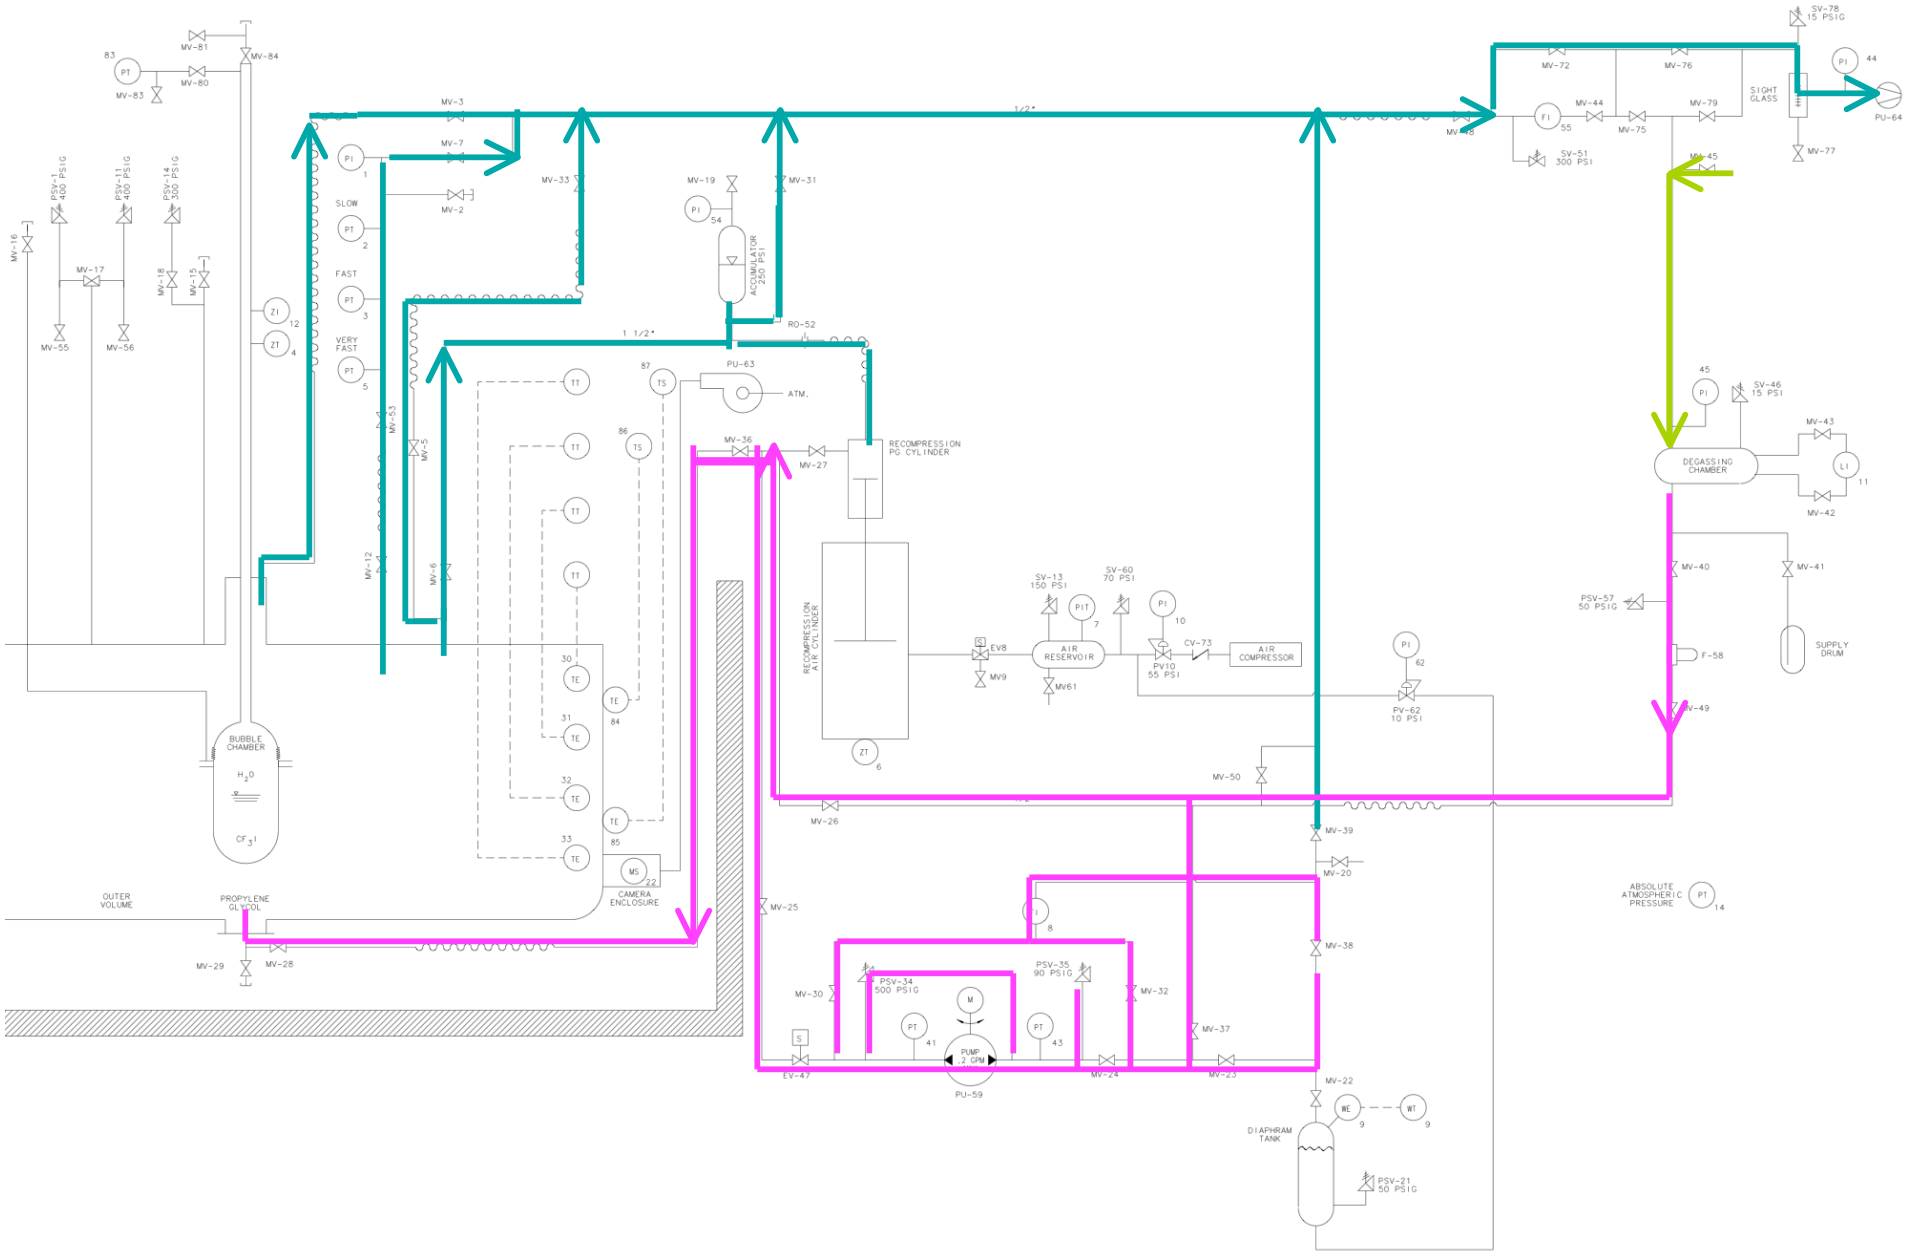
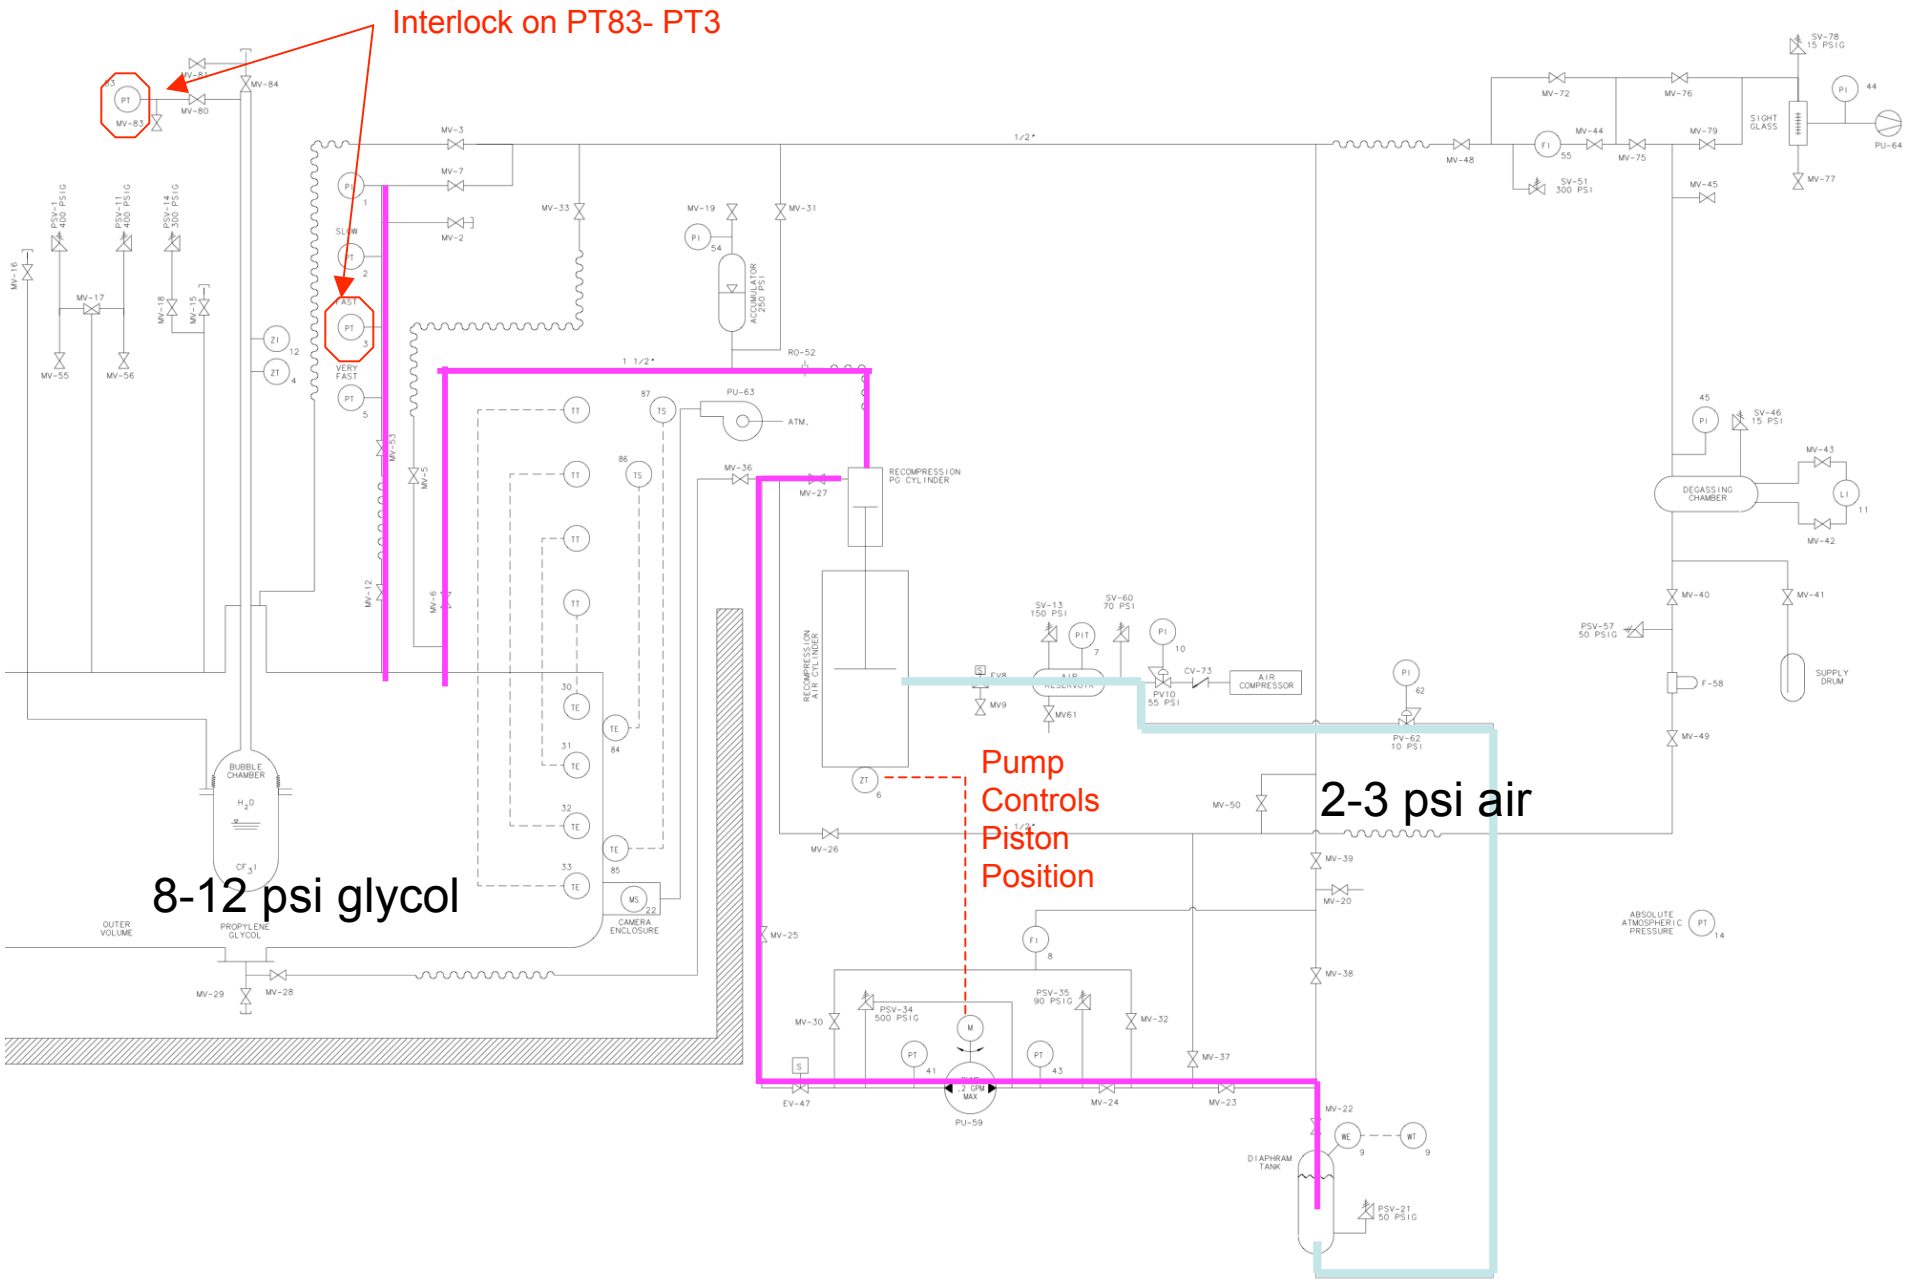
7. Pressure Maintenance With Glycol in OV and Empty IV