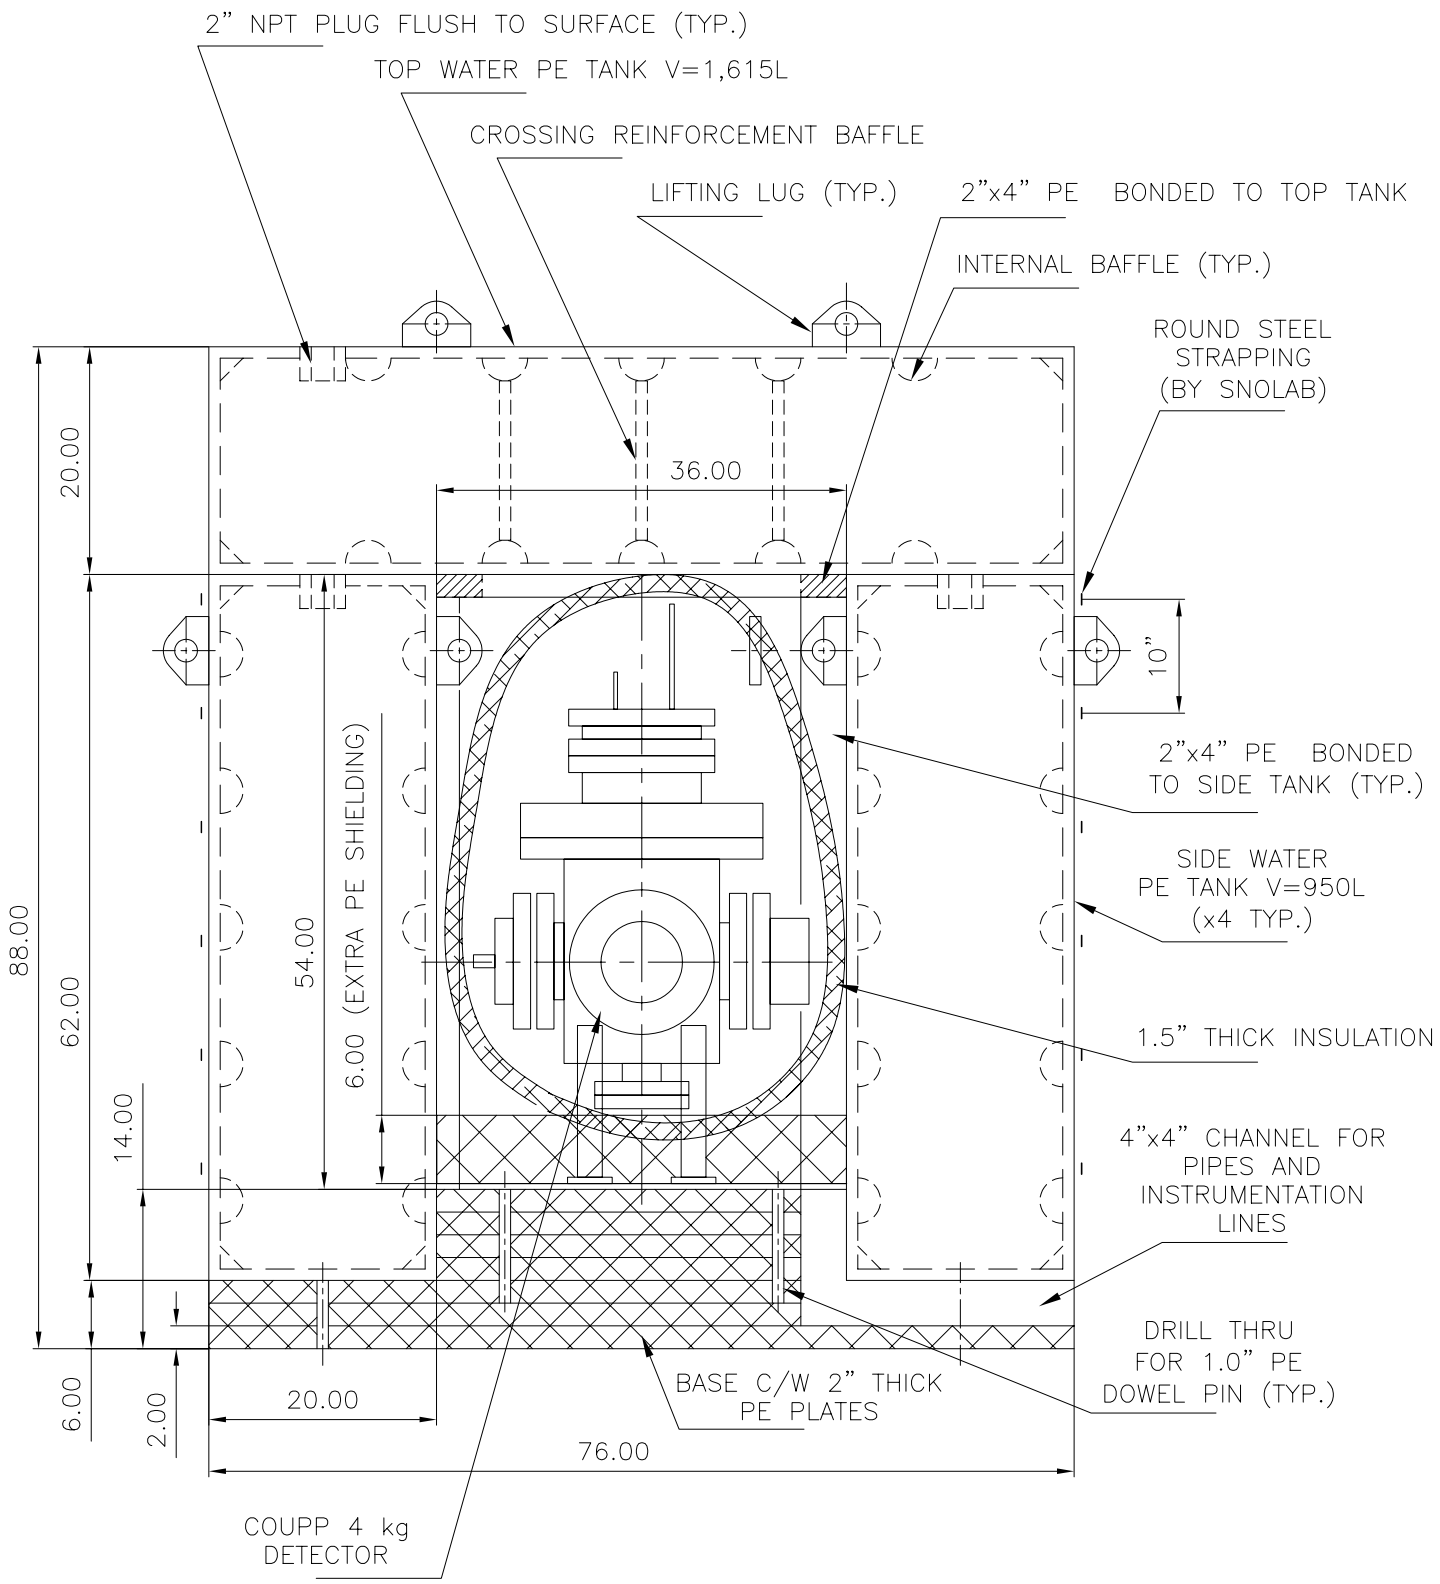
2" NPT PLUG FLUSH TO SURFACE (TYP.)
TOP WATER PE TANK V=1,615L
CROSSING REINFORCEMENT BAFFLE
LIFTING LUG (TYP.)
2"x4" PE BONDED TO TOP TANK
INTERNAL BAFFLE (TYP.)
ROUND STEEL STRAPPING (BY SNOLAB)
36.00
20.00
10"
2"x4" PE BONDED TO SIDE TANK (TYP.)
SIDE WATER PE TANK V=950L (x4 TYP.)
1.5" THICK INSULATION
4"x4" CHANNEL FOR PIPES AND INSTRUMENTATION LINES
DRILL THRU FOR 1.0" PE DOWEL PIN (TYP.)
BASE C/W 2" THICK PE PLATES
COUPP 4 kg DETECTOR
88.00
62.00
54.00
6.00 (EXTRA PE SHIELDING)
14.00
6.00
2.00
20.00
76.00

ELEVATION