


**Memorandum of Understanding Between  
COUPP and SNOLAB**

**To Operate the COUPP 4-kg Bubble Chamber at  
SNOLAB**

**June 7, 2010**

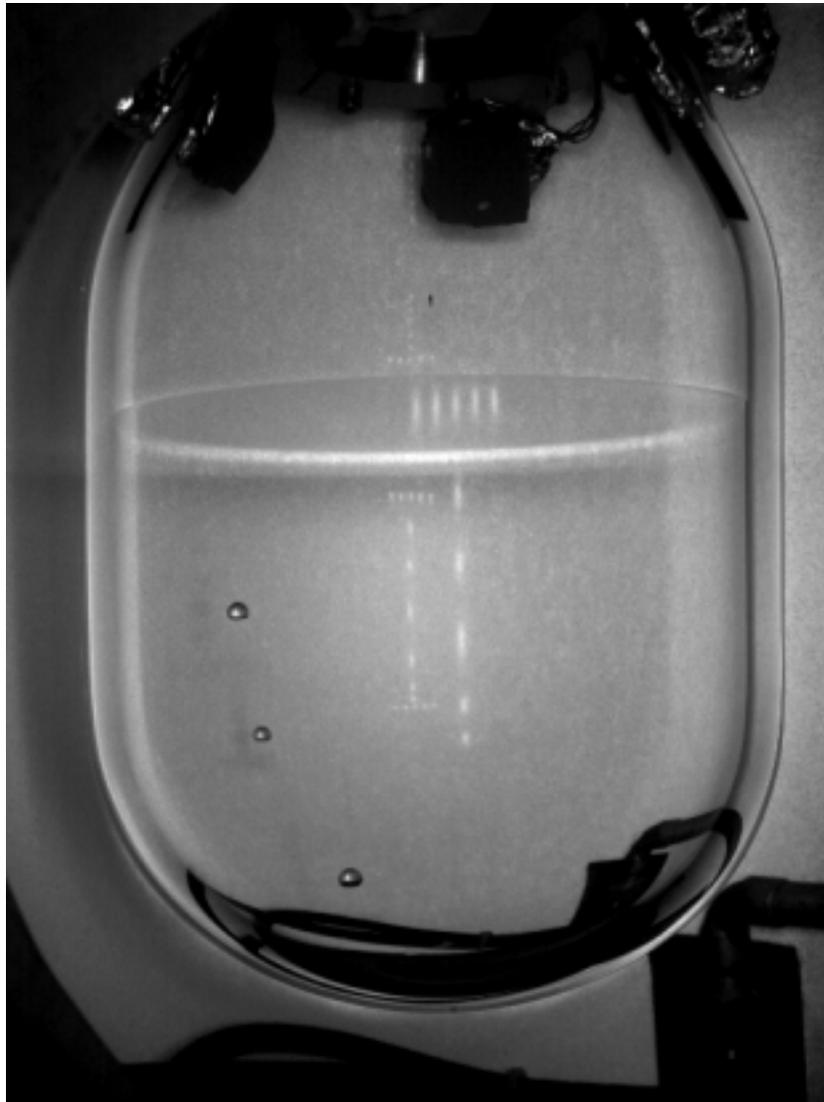

## Table of Contents

<b>INTRODUCTION .....</b>	<b>2</b>
<b>PERSONNEL AND INSTITUTIONS .....</b>	<b>3</b>
<b>OVERVIEW .....</b>	<b>3</b>
<b>RESOURCE REQUIREMENTS.....</b>	<b>4</b>
RESOURCE REQUIREMENTS SUMMARY: .....	5
<b>THE EXPERIMENTAL APPARATUS: .....</b>	<b>9</b>
<b>THE DEPLOYMENT PLAN:.....</b>	<b>10</b>
FOUR SEQUENCES OF EVENTS:.....	10
<b>THE RUN PLAN: .....</b>	<b>13</b>
<b>RESOURCES AND RESPONSIBILITIES:.....</b>	<b>14</b>
EQUIPMENT .....	14
TRAVEL.....	15
ENGINEERING AND TECHNICIAN SUPPORT FROM SNOLAB WILL INCLUDE: .....	15
ENGINEERING AND TECHNICIAN SUPPORT FROM FERMILAB:.....	15
<i>PPD Mechanical Department Support.....</i>	<i>15</i>
<i>PPD Technical Centers Department Support.....</i>	<i>16</i>
<i>PPD Electrical Engineering Department Support.....</i>	<i>17</i>
<b>SUMMARY OF COSTS .....</b>	<b>17</b>
<b>SPECIAL CONSIDERATIONS.....</b>	<b>17</b>
<b>APPENDIX I: - HAZARD IDENTIFICATION CHECKLIST .....</b>	<b>19</b>

## Introduction

This Memorandum of Understanding is between SNOLAB and the experimenters of the COUPP collaboration. It covers the installation, commissioning, and operations of the COUPP 4kg bubble chamber in a deep underground location at SNOLAB.

The memorandum is intended to provide a work allocation for SNOLAB, the funding agencies and the participating institutions. It reflects an arrangement that currently is satisfactory to the parties; however, it is recognized and anticipated that changing circumstances of the evolving research program will necessitate revisions. The parties agree to negotiate amendments to this memorandum that will reflect such required adjustments.

## Personnel and Institutions

Spokesperson: Juan Collar

Institutions:

Indiana University South Bend, South Bend, USA

E. Behnke, J. Behnke, J.H. Hinnefeld, I. Levine (PI), and T. Shepherd

Fermi National Accelerator Laboratory, Batavia, USA

S.J. Brice, D. Broemmelsiek, P.S. Cooper, M. Crisler, J. Hall, H. Lippincott, E. Ramberg, and A. Sonnenschein

The University of Chicago, USA

J. Collar (PI), C.E. Dahl, D. Fustin, and A. Robinson

## Overview

The COUPP 2-liter bubble chamber is an upgrade of the original 1-liter COUPP bubble chamber which was designed and constructed at the University of Chicago in 2004 and was in operation in the MINOS near detector hall at Fermilab from 2005 through 2008. The early work with the 1-liter chamber demonstrated the technical feasibility of a large, clean, continuously stable bubble chamber as a dark matter detector and the exceptional  $\sim 10^{10}$  rejection of gamma and beta recoil backgrounds, and produced new limits<sup>1</sup> on spin-dependent WIMP-nucleus interactions.

While notably successful in gamma and beta recoil discrimination, the maximum size of a dark matter bubble chamber was technically limited by the rate of bubble nucleation on the vessel walls, and the physics reach of the bubble chamber technique has been limited by background events due to alpha decays of unstable nuclei within the bubble chamber fluid. The COUPP 2-liter bubble chamber upgrade was initiated with three specific goals:

- 1) *Test the use of a synthetic silica inner vessel* to eliminate bubble nucleation on the vessel walls. Our working theory was that this class of events was due to alpha particle emissions from the vessel walls arising from the intrinsic Uranium and Thorium contamination of natural quartz.
- 2) *Demonstrate Improved fluid handling* procedures to minimize the injection of radon into the vessel during filling.
- 3) *Evaluate the acoustic alpha recoil discrimination* reported<sup>2</sup> by the PICASSO collaboration.

The COUPP 2-liter bubble chamber was installed in the MINOS near detector hall at Fermilab in August 2009 and ran through December 2009. It was successful in each

---

<sup>1</sup> “Spin Dependent WIMP Limits from A Bubble Chamber” Science 319:933-936,2008

<sup>2</sup> Aubinet al., arXiv:0807.1536

## MOU Between COUPP and SNOLAB

of its stated goals. The synthetic silica vessel reduced the wall nucleation rate to a level sufficiently low for the largest chambers currently under consideration. By better choices of plumbing materials, we reduced the intrinsic alpha emitter contamination of the bubble chamber fluid to  $\sim 1$  event/kg/day. Most important, the test resulted in a spectacular confirmation<sup>3</sup> of acoustic alpha discrimination, and in new world best limits for spin-dependent WIMP interactions<sup>4</sup>.

Because the capabilities of the COUPP-2 liter bubble chamber were limited by the cosmic ray backgrounds at the 300-foot depth of the Fermilab MINOS site, the experiment is being moved from Fermilab to SNOLAB where it will operate at a depth of 6800 feet. The goals of this deep site run are<sup>5</sup>:-

- 1) Conduct a run with the world's best physics reach for spin-dependent WIMP-nucleus scattering and a reach in the spin-independent mode that is among the world's best.
- 2) Measure the level of acoustic alpha rejection at the 10,000/1 level
- 3) Establish all the elements needed to operate COUPP bubble chambers at SNOLAB. This will smooth the process of bringing future chambers deep underground (e.g. the upcoming 60kg device).

### Resource Requirements

Exclusive of its shielding, the COUPP 2-liter bubble chamber experiment is a very small and easily portable device consisting of the bubble chamber itself, a small hydraulic controls unit, a small laboratory NESLAB heater/chiller unit, and a single data acquisition relay rack. The combined weight of all the elements (again exclusive of the veto/shielding) is less than 2000 lb and could be delivered in a single truckload. The COUPP 2-liter bubble chamber is illustrated in **Figure 1**.

At the 6800-foot depth of the SNOLAB site, the experiment will not require active cosmic ray muon tagging. To shield the experiment against neutrons originating from the radioactivity of the surrounding rocks, the experiment will be surrounded by a thickness of 20 inches (50 cm) of polyethylene/water shielding. An elevation view of the chamber as it will sit in its shielding is provided as **Figure 2**.

The footprint of the experiment is roughly 8' x 12'. This space is sufficient to contain the polyethylene/water shielding, the hydraulic cart, the NESLAB heater/chiller unit, the data acquisition rack, and a chair.

---

<sup>3</sup> "COUPP progress report: results from the 4kg test chamber" C. Eric Dahl (Univ. of Chicago), Ninth UCLA Symposium on Sources and Detection of Dark Matter and Dark Energy in the Universe, Feb 24-25, 2010.

<sup>4</sup> "New Dark Matter Limits from COUPP," Jeter Hall, Fermilab Joint Experimental Theoretical Seminar, March 19, 2010.

<sup>5</sup> "COUPP Deep Underground Deployment Plan" available from <http://coupp-docdb.fnal.gov/cgi-bin/ShowDocument?docid=51>

## MOU Between COUPP and SNOLAB

The resources required by the experiment are modest. The data acquisition rack requires a single 60 Hz, 110V, 20A circuit. The hydraulic cart is powered from the data acquisition rack. The NESLAB heater/chiller unit requires a separate 60 Hz, 110V, 20A circuit. To power auxiliary equipment used during installation and commissioning (vacuum pump, oil pump) a third separate outlet would be convenient. The hydraulic cart additionally requires a compressed air supply at >50 psig. The operation of the experiment consumes compressed air at a rate of less than 10 SCF per day.

The run plan includes the use of radioactive sources for calibration. The chamber will be equipped with a source tube through which sources can be moved on a wire to a fixed position external to the pressure vessel. It is expected that  $^{137}\text{Cs}$  sources will be used with strengths ranging from 0.1  $\mu\text{Ci}$  to 1 mCi to study electron recoil event rejection and a very weak neutron source ( $\sim 5$  n/s), either AmBe or Californium will be needed to understand the nuclear recoil response. In addition a weak thoron source is being developed for installation at a later date to dope the chamber fluid for alpha discrimination studies. SNOLAB procedures for the handling and transport of radioactive sources and for bringing sources onsite will be followed at all times.

Despite the key role played by the acoustic signature of each bubble in the identification of nuclear recoil events, we do not anticipate any special considerations for environmental acoustic noise. The acoustic sensors operated successfully in a very noisy environment in the NuMI area at Fermilab. It would however be prudent to avoid the close proximity to any vibrating or noisy equipment.

### Resource Requirements Summary:

The resources are needed on surface during initial testing and underground for physics running.

Footprint: 8 x 12 feet ~100 square feet

Electrical: (3) 60Hz, 110V, 20A circuits

Network: 100Mbps

Compressed Air: >50 psig, <10 SCF/day

Radioactive Sources (only needed underground):

Encapsulated neutron source  $\sim 5$  n/s, either AmBe or  $^{252}\text{Cf}$

Encapsulated  $^{137}\text{Cs}$  gamma sources, 0.1  $\mu\text{Ci}$  to 1 mCi

Weak thoron source

# MOU Between COUPP and SNOLAB

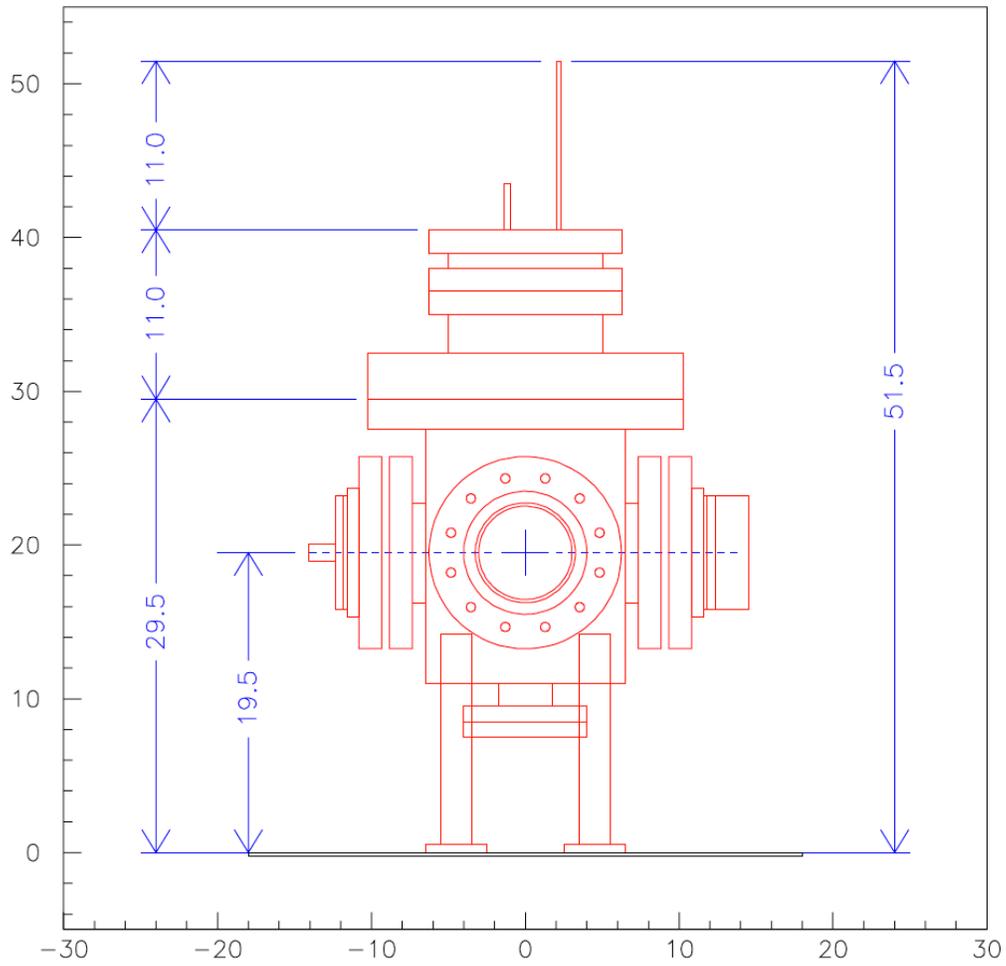


Figure 1: An Elevation View Cartoon of the COUPP 4-kg Bubble Chamber.  
Dimensions are in inches.

MOU Between COUPP and SNOLAB

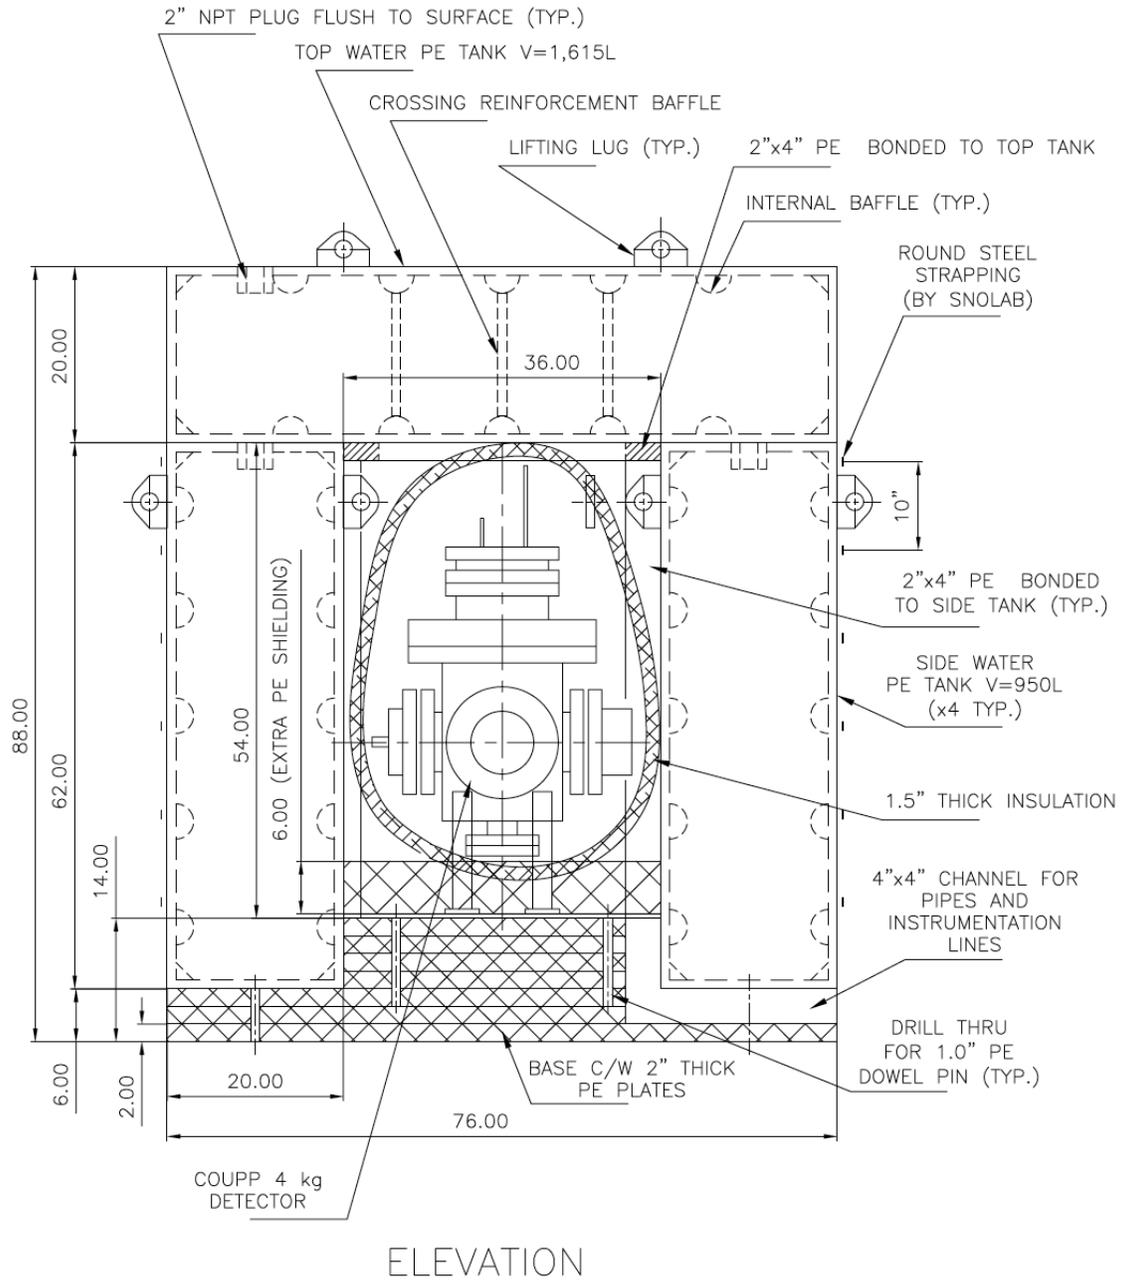


Figure 2: An Elevation Drawing showing the COUPP-4kg bubble chamber within its polyethylene/water shielding.

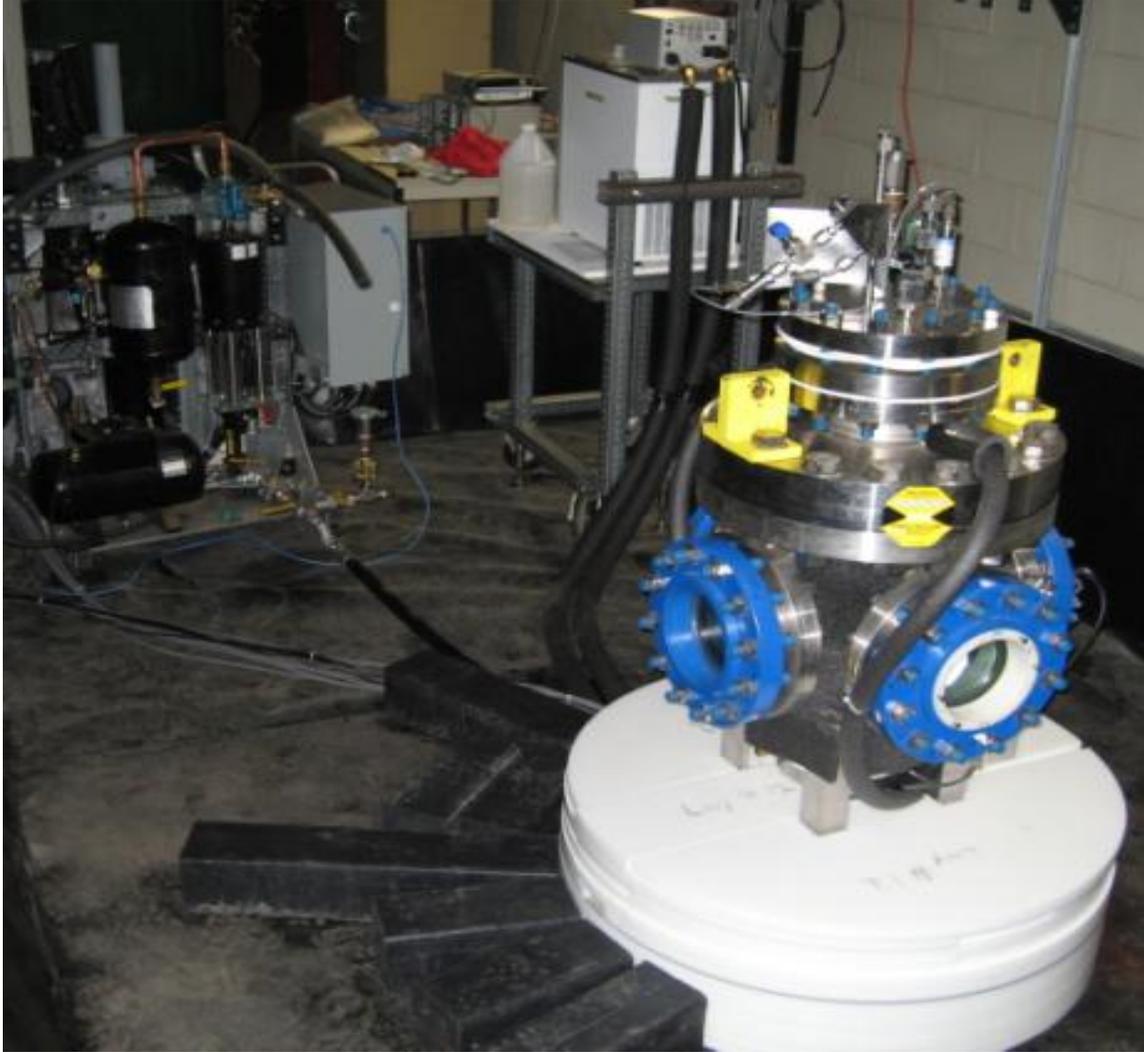


Figure 3: This photograph shows the COUPP 2-liter bubble chamber as it appeared in the Fermilab MINOS area installation. The Hydraulic Controls Cart is visible to the left and the NESLAB RTE-740 heater/chiller unit can be seen behind the chamber.

## The Experimental Apparatus:

The elements of the COUPP 2-liter Bubble Chamber Experiment are listed below:

- 1) The Shielding consists of
  - a. Base Slab of polyethylene 76" square, 6" high with additional raised polyethylene pedestal base 36" square, 8" high.
  - b. Four Polyethylene/water side shield tanks 20"x56"x62" high.
  - c. One Polyethylene/water top shield tank 76"x76"x20" high.
  
- 2) The Bubble Chamber
  - a. One stainless steel pressure vessel, including
    - i. Pressure Vessel Body
    - ii. Pressure Vessel load distributing base plate
    - iii. Top and bottom flanges
    - iv. Top Flange Spacer
    - v. Internal Heater/chiller coils
    - vi. Four pressure rated 6" diameter viewports
    - vii. Retro-reflective backdrop for photography
    - viii. Two FireWire video cameras
    - ix. LED array for photography illumination
  
  - b. Inner vessel Assembly, including
    - i. Quartz inner vessel
    - ii. Pressure balancing bellows
    - iii. Top flange assembly, plumbing and valves
    - iv. Instrumentation (temperature and pressure transducers)
    - v. Instrumentation (acoustic transducers)
    - vi. Instrumentation wiring, feed-through, and breakout box.
  
- 3) The Data Acquisition and Controls Rack, including
  - a. One National Instruments PXI Chassis with instrumentation modules
  - b. One 1U rack-mount National Instruments SC-2345 Instrumentation Wiring Chassis.
  - c. Two LINUX computers (one for data management and communications, one hot spare.)
  - d. Auxiliary electronics modules
    - i. 1U rack-mount Acoustic Transducer Bias Supply
    - ii. 1U rack-mount LED driver module
    - iii. A small commercial bias supply for a fast pressure transducer.
  
- 4) The Hydraulic Cart which includes
  - a. Compressed air system

## MOU Between COUPP and SNOLAB

- b. Fast solenoid actuated pneumatic/hydraulic cylinder for fast compression
  - c. Stepping motor driver slow hydraulic cylinder for pressure control
  - d. Pressure and temperature instrumentation
  - e. Commercial controls processor
  - f. Hydraulic plumbing connection to the bubble chamber pressure vessel.
- 5) The NESLAB heater/chiller unit
- a. A commercial NESLAB RTE-740 laboratory circulating heater/chiller
  - b. Insulated circulation lines connecting the NESLAB bath to the heater/chiller coils in the bubble chamber pressure vessel
- 6) Cable Plant
- a. Roughly one dozen instrumentation, control, and network cables are required for the experiment
- 7) Auxiliary Equipment
- a. Vacuum Pump used in fluid handling and setup operations.
  - b. Propylene glycol is (2) five-gallon plastic containers.
  - c. Glycol handling hose and valve.
  - d. CF<sub>3</sub>I transport and handling equipment
    - i. 4-liter Swagelok sample cylinder used for transport and transfer.
    - ii. CF<sub>3</sub>I transfer line
    - iii. Refrigerant scale used to meter CF<sub>3</sub>I transfer.
  - e. Dummy hydraulic load for use in commissioning and testing the hydraulic cart with the DAQ.
  - f. Dummy thermal bath load for use in commissioning and testing the NESLAB heater/chiller unit with the DAQ.
  - g. Radioactive sources for use in chamber calibration and testing
    - i. Sealed gamma sources 1-100  $\mu$ Ci
    - ii. Sealed neutron sources  $\sim$ few neutrons per second

### The Deployment Plan:

#### Four Sequences of Events:

The plan for getting the experiment ultimately assembled in the SNOLAB underground facility breaks into 4 threads as outlines below. The goal is to have these threads come together in  $\sim$ August 2010 with the underground commissioning of the experiment.

- 1) Underground Site Preparation

## MOU Between COUPP and SNOLAB

- a. Agree upon a final location and footprint for the experiment
- b. Prepare and approve final drawings for the
  - i. The experiment layout
  - ii. Shielding elements
  - iii. Electrical, compressed air, network, and fire protection distribution
- c. Procure shielding elements
  - i. Base slab and pedestal, side and top tanks
- d. Ship Pressure Vessel and Pressure Vessel Base Plate to SNOLAB
- e. Clean and Deliver components to SNOLAB Underground area.
- f. Execute the Site Preparation Elements, including
  - i. Install electrical, compressed air, fire protection, lighting.
  - ii. Install and level shielding base slabs and pedestal
  - iii. Install pressure vessel on its base plate on the shielding pedestal.

### 2) DAQ and instrumentation commissioning:

- a. Complete DAQ modifications and testing using the FNAL DAQ at Lab F.
- b. Receive new DAQ elements at the Lab 3 North clean room at Fermilab
- c. Perform First Level Commissioning activities, including
  - i. Acceptance testing (where appropriate) of components
  - ii. Software installation and configuration
  - iii. Network interconnectivity tests.
  - iv. Full system DAQ software tests
- d. Re-package DAQ equipment for shipment to SNOLAB
- e. Receive DAQ equipment at SNOLAB, clean and stage in an above ground laboratory space.
- f. Complete Level 2 Commissioning activities, including
  - i. Populate Relay racks
  - ii. Full system DAQ test
  - iii. Network connectivity tests to Fermilab
  - iv. Exercise of full data path including analysis and archive tools.
- g. Disassemble DAQ elements and prepare for and transport to the site of the underground installation.
- h. Set up the DAQ and instrumentation elements in final form in the underground site. This includes
  - i. Place and set the hydraulic cart (it has screw jack leveling feet)
  - ii. Complete the plumbing connection of the hydraulic cart to the pressure vessel

## MOU Between COUPP and SNOLAB

- iii. Setup the NESLAB unit and complete its insulated plumbing connections to the pressure vessel
- iv. Place the relay racks
- v. Cable the experiment, including
  - 1. Instrumentation cabling
  - 2. Control cabling
  - 3. Network cabling.
  
- vi. Fill the Pressure Vessel and hydraulic cart with propylene glycol and de-gas.
  
- i. Insulate the pressure vessel
- j. Complete Level 3 Commissioning Activities, including:
  - i. Exercise the full DAQ and Controls system
  - ii. Test Hydraulic Cart function
    - 1. Expansion/compression
    - 2. Pressure control
    - 3. Alarms and Limits
  
  - iii. Test NESLAB temperature Regulation
  - iv. Test Auto-Run DAQ capabilities
  - v. Test remote operations functionality,
  - vi. Test data path connectivity through to analysis and archiving at Fermilab

### 3) Inner Vessel Assembly

- a. Disassemble the original inner vessel assembly
- b. Bag and tag parts for transport to AD A0 cleaning facility
- c. Complete the cleaning and parts prep. This includes
  - i. Inner vessel components (vessel, bellows, flanges, seals, etc...)
  - ii. Water distillation components (still, lines)
  
- d. Assemble the inner vessel (vessel, bellows, and flanges, seals)
- e. Final rinse at A0
- f. Vacuum leak check.
- g. Package and transport to Lab 3 COUPP clean room.
- h. Set up and execute water distillation.
- i. Setup in the Lab 3 North clean room.
- j. Perform sensor installation and wiring, including
  - i. Temperature transducers
  - ii. Pressure transducers
  - iii. Acoustic transducers.
- k. Test and calibrate where appropriate transducers.
- l. Package the inner vessel assembly for transport

## MOU Between COUPP and SNOLAB

- m. Transport the inner vessel assembly and CF<sub>3</sub>I handling equipment to SNOLAB.
- n. Receive, clean, and move underground.
- o. At this point, the inner vessel assembly is ready to mate with the already tested pressure vessel, hydraulic cart, NESLAB, and DAQ in the underground site.
- p. Install the inner vessel
- q. Evacuate and backfill the pressure vessel with glycol
- r. Cool the vessel and perform the CF<sub>3</sub>I distillation/fill.
- s. Warm the chamber to its operating point and execute final commissioning tests, including
  - i. Expansion, testing for stability, radon etc.
  - ii. Use neutron source to confirm operations.

### 4) Shielding Tanks

- a. Agree upon Final Conceptual Design
- b. Obtain quotations based on the preliminary drawings.
- c. Finalize the design drawings
- d. Procure the Tanks (Are the base slab elements available at an earlier time? The base is needed early. The tank installation is the last installation step.)
- e. Receive the tanks, clean transport underground.
- f. Test?
- g. Install the shielding tanks, fill.

### **The Run Plan:**

It is intended to have all the components of the experiment assembled underground in August 2010. After a period of commissioning that should last about 2 weeks the experiment will run for several months with the aim of setting world beating dark matter limits and improving the knowledge of acoustic alpha discrimination by an order of magnitude over what was done in the NuMI site at Fermilab. The details of this running are yet to be finalized. Decisions as to how much calibration data to take, whether and how to scan the vessel pressure, and what operating temperature to use need only be decided at the start of the run and after more experience is gained in underground operations. It is certainly the case that neutron and, probably, gamma sources will be needed at various times for chamber calibration.

It is anticipated that after several months of operation the 4kg device discussed in this document will be joined underground at SNOLAB by the COUPP 60kg device (the 60kg device will be the subject of a future MOU between COUPP and SNOLAB).

## MOU Between COUPP and SNOLAB

Once the COUPP 60kg chamber is running it will quickly make the 4kg obsolete as a dark matter search device. At that point the 4kg will become the chamber used for precision studies of alpha discrimination using an alpha source<sup>6</sup>. In this mode it can be expected to run for at least another year.

### Resources and Responsibilities:

The resources for the experiment will be provided as follows:

#### Equipment

- 1) SNOLAB will provide
  - a. Site preparation, including
    - i. Electrical distribution
    - ii. Compressed air
    - iii. Fire protection
    - iv. Lighting
  - b. Shielding, including
    - i. Shielding base slab and pedestal
    - ii. Shielding tanks, side and top.
  - c. Weak neutron sources
  - d. Gamma sources
  
- 2) University of Chicago Will Provide
  - a. The Bubble Chamber Pressure Vessel
  - b. The Data Acquisition System
    - i. National Instruments PXI Chassis w/ embedded processor
    - ii. Data Acquisition Modules
    - iii. Software Licenses LabVIEW, LabVIEW VISION
    - iv. Instrumentation Cabling
  - c. Linux data handling computers (2)
  - d. 19" Racks (2) with rack mounted monitors and keyboards
  - e. The heater/chiller
  
- 3) Indiana University South Bend Will Provide
  - a. Acoustic Transducers
  
- 4) Fermilab Will Provide:
  - a. The Hydraulic Controls Cart
  - b. The Inner Vessel Assembly
  - c. The Acoustic Transducer Biasing Module

---

<sup>6</sup> "COUPP Deep Underground Deployment Plan" available from <http://coupp-docdb.fnal.gov/cgi-bin/ShowDocument?docid=51>

## MOU Between COUPP and SNOLAB

- d. The Photography elements, including
  - i. FireWire Cameras
  - ii. LED array
  - iii. CAMERA/LED Interface Module
  - iv. Retro-reflective backdrop
- e. Readout Components for the Acoustic Transducers, including
  - i. Preamplifier boards
  - ii. Acoustic transducer bias box

### Travel

All travel to SNOLAB for installation and operation of the experiment will be paid for by the University of Chicago NSF S4 grant

### Engineering and Technician Support From SNOLAB will include:

- 1) Engineering and Design Support for Site Preparation
  - a. Appropriate drawings and specifications for
    - i. Lighting and Electrical distribution
    - ii. Compressed air Distribution
    - iii. Fire Protection
    - iv. Network Distribution
- 2) Engineering and Design Support for Shielding
- 3) Technician and other appropriate labor for
  - a. Installation of Site Infrastructure (lights, power, compressed air fire protection, network.)
  - b. Installation of Shielding Base and Pedestal
  - c. Installation of Shielding tanks
  - d. Cleaning and underground transport of the COUPP experimental apparatus

### Engineering and Technician Support From Fermilab:

#### PPD Mechanical Department Support

- e. Process Flow Diagram
  - i. Drafting for the Diagram
  - ii. Mechanical Tech for component checking and tagging
  - iii. Engineering Support for review and approval
- f. The Hydraulic Cart
  - i. Mechanical Tech Support for revising the cart plumbing. This includes specification, procurement, and installation of new plumbing components.

## MOU Between COUPP and SNOLAB

- ii. Mechanical Tech Support for specifying and procuring plumbing components to connect the hydraulic cart to the experiment pressure vessel.
- g. The Inner Vessel Assembly
  - i. Mechanical Tech Support for specification and procurement of miscellaneous expendables of the Inner Vessel Assembly. These include:
    - 1. Filters,
    - 2. Seals,
    - 3. Valve kits.
  - ii. Mechanical Tech Support for disassembling the inner vessel components and for bagging and tagging them.
  - iii. Mechanical Tech Support for overseeing the transport of inner vessel components to the Accelerator Division A0 Cleaning Facility.
  - iv. Mechanical Tech Support for Assembly of the inner vessel components. This includes
    - 1. Assembly and sealing of the top flange, the bellows, and the inner vessel
    - 2. Final rinse of the inner vessel assembly
    - 3. Vacuum Leak Checking
    - 4. Preparation of top flange components
      - a. Valves assemblies
      - b. Electrical feed-through
      - c. Sensor attachment and wiring
  - v. Mechanical Tech Support for Water Fill/Distillation
    - 1. Mobilization of still components
    - 2. Overseeing the cleaning of still components at A0 (this task is likely integrated with the cleaning of the inner vessel components.)
    - 3. Assembly and preparation for the water distillation apparatus in the Lab 3 Clean Room.
    - 4. Execution of the water distillation process
  - vi. Preparation of the Inner Vessel Assembly for Transport.
  - vii. One week of travel to SNOLAB by a mechanical tech to carry out final installation of inner vessel assembly into pressure vessel.

### PPD Technical Centers Department Support

- h. Design and Fabrication support for Auxiliary Shielding Pieces surrounding the chamber legs.

## MOU Between COUPP and SNOLAB

- i. Installation Support and Maintenance for KEPDirect PLC firmware and communications software.

### PPD Electrical Engineering Department Support

- j. Engineering Design for Acoustic Transducer preamplifier boards
- k. Fabrication and assembly for preamplifier boards
- l. Engineering Design Support for Acoustic Transducer Bias Box modifications
- m. Engineering Design Support for Camera/LED interface box revisions.
- n. Engineering Design Support for Modifications to Hydraulic Cart Interface Box.

### Summary of Costs

	Engineer time	Technician Time	M&S	Travel
SNOLAB	---	---	---	
Fermilab-PPD-Mech	4 days	4 weeks		
Fermilab-PPD-Tech	4 days	1 week		
Fermilab-PPD-EE	3 days	1 week		
University of Chicago (Collar Group)			\$47k	\$30k

### Special Considerations

1. To carry out the experiment a number of Environmental, Safety and Health (ES&H) reviews are necessary. The Spokesperson will follow those procedures in a timely manner, as well as any other safety requirements put forth by SNOLAB.
2. All regulations concerning radioactive sources will be followed. No radioactive sources will be carried onto the SNOLAB site or moved without the approval of the SNOLAB radiation safety officer.
3. The experimenters will be responsible for maintaining both the electronics and the computing hardware supplied by them for the experiment

## MOU Between COUPP and SNOLAB

4. Upon completion of the experiment the experimenters agree to remove their experimental equipment as SNOLAB requests them to. They agree to remove it expeditiously and in compliance with all ES&H requirements, including those related to transportation. All the expenses and personnel for the removal will be borne by the experimenters unless removal requires facilities and personnel not able to be supplied by them, such a rigging, crane operation, etc.

**Appendix I: - Hazard Identification Checklist**

<b>Cryogenics</b>		<b>Electrical Equipment</b>		<b>Flammable Gases or Liquids</b>	
	Beam line magnets		Cryo/Electrical devices	Type:	
	Analysis magnets		capacitor banks	Flow rate:	
	Target		high voltage	Capacity:	
	Bubble chamber		exposed equipment over 50 V	<b>Hazardous/Toxic Materials</b>	
<b>Pressure Vessels</b>		<b>Other Gas Emissions</b>		List hazardous/toxic materials planned for use in an experimental enclosure:	
12inch	inside diameter	Type:			
220 PSI	operating pressure	Flow rate:			
glass	window material	Capacity:			
1 inch	window thickness	<b>Radioactive Sources</b>			
<b>Vacuum Vessels</b>			permanent installation		
5.8 inch	inside diameter	X	temporary use		
vacuum	operating pressure	Type:	<b>Cf neutron</b>		
quartz	window material	Strength:	<b>5 n/sec</b>		
1/8 inch	window thickness	<b>Hazardous Chemicals</b>			
<b>Lasers</b>			Cyanide plating materials		
	Permanent installation		Scintillation Oil		
	Temporary installation		PCBs		
	Calibration		Methane	<b>Mechanical Structures</b>	
	Alignment		TMAE	X	Lifting devices
type:			TEA		Motion controllers
Wattage:			photographic developers		scaffolding/elevated platforms
class:			Other: Activated Water?		Others